

Analysis of Solar Power Plants with The Combination Systems of PV Module-Reflective Mirror

by Budhi Suyitno

Submission date: 04-Apr-2022 09:21AM (UTC+0700)

Submission ID: 1800787707

File name: B4._Revision_-_5111-467_-_Budhi_Muliawan_Suyitno_1.pdf (761.09K)

Word count: 4858

Character count: 23952

Analysis of Solar Power Plants with The Combination Systems of PV Module-Reflective Mirror

¹
BUDHI MULIAWAN SUYITNO
Department Mechanical Engineering
Universitas Pancasila
Srengseng Sawah, Jagakarsa, Jakarta 12640
INDONESIA

¹ A ODE MOHAMMAD FIRMAN
Department Mechanical Engineering
Universitas Pancasila
Srengseng Sawah, Jagakarsa, Jakarta 12640
INDONESIA

ERLANDA AUGUPTA PANE
Department Mechanical Engineering
Universitas Pancasila
Srengseng Sawah, Jagakarsa, Jakarta 12640
INDONESIA

MOHAMED IBRAHIM KRIBA
Department Mechanical Engineering
Universitas Pancasila
Srengseng Sawah, Jagakarsa, Jakarta 12640
INDONESIA

ISMAIL
Department Mechanical Engineering
Universitas Pancasila
Srengseng Sawah, Jagakarsa, Jakarta 12640
INDONESIA

⁹
Abstract: - Solar energy is a combination of light and heat produced by the sun, where this energy is utilized by humans through solar collector technology consisting of PV modules to be converted into electrical energy. The development of PV module technology is carried out to improve its performance, where one of these technologies uses a reflecting mirror to increase the amount of sun radiation captured by the surface of the PV module. This research method uses performance analysis of the utilization of reflector mirrors added to the PV module system by using two different cases, among others are the use of two and four mirrors along the sides of the PV module. The results showed that the application of four reflective glass can direct the sun's radiation to the surface of the PV module with the amount of radiation intention doubled. This result is a kind of technology that gives us a good result to utilize it in building the solar power plant.

Key-Words: - Mirror, Module, Photovoltaic, Radiation, Renewable Energy, Solar, Weather

²
Received: May 31, 2019. Revised: May 4, 2020. Accepted: May 22, 2020. Published: May 29, 2020
(WSEAS will fill these dates in case of final acceptance, following strictly our data base and possible email communication).

1 Introduction

Rapid development in alternative energy source increases the utilization of renewable energy [1]. Renewable energy can be utilized from wind [2] and solar power [3]. Storing renewable energy can be done in form of electrical [4] and thermal energy [5]. Storing thermal energy can be combined by electrical energy to generate solar thermal electricity system [6]. Photovoltaic (PV) is a technology of developing rapidly that can utilize Solar Thermal Electricity (STE) which has more potential to convert into electrical power [7–9]. As their accessible markets expand, these technologies look more complementary than competitors [10–12]. One solution to make renewable energy more competitive is to combine reflector mirrors to the PV modules. By install, reflector mirrors can harvest more of the solar irradiance from the direct sunlight to the PV modules surface with the aim to increase the output electricity.

Based on experimental [13], the installation of reflector mirrors to existing 10 Watts cells panel can increase the intensity of light on the PV, and keep a recording of the current and the voltage of solar cells and make a comparison with the traditional model without reflector mirrors. The reflectivity of mirrors provides more energy than traditional panels without the reflector. Solar cells increased the energy power from 10 watts to 22 Watts power. The aim of the reflector-mirrors installation is to optimize the received solar irradiance on the PV module surface, maintaining an overall geometric size of the system as small as possible has been approached earlier. The conclusion is the mirror width decreases with the tracking step duration and the concentration ratio increases with the increase of mirror angle, therefore the huge value of solar irradiance can be reached by the large size of the system required [14]. In order to additional radiation offered by mirrors will lead to a significant increase in output energy of the PV system.

Consequently, the researchers intend to make new research using a slightly different system, thus with this technology being expected electricity generation will be greater compared to existing technologies. Hence, this research is trying to create a solar power plant that can generate electricity of 1 MW with PV technology combined with 4 surrounding mirrors and its results are compared with the performance of a PV module combined with two reflecting mirrors [15]. With reference to the existing solar panel systems, this research tries to create a new system to generate more electricity from sunlight. By building a reflection consist of four mirrors to PVs as showing in Figure 1, it is expected that the energy produced will be increased by up to 50%.

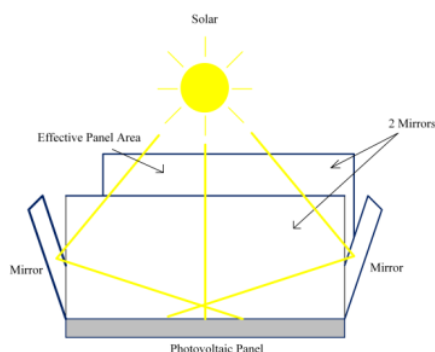


Fig. 1. PV module – 4 mirror systems

2 Methodology

The research methodology that was carried out was to design a power plant by utilizing solar energy in the form of a PV module system combined with sun reflecting mirror. The design process of the power plant begins with the process of mapping the condition of the application area of the solar energy power plant system. Data on the potential of solar energy in the form of solar radiation in the application area is used as basic data for the determination of the parameters of the PV module system design. The process of designing the module system is carried out a performance test by using a combination of sun mirrors which consists of two types namely two and four mirrors. The combination of the reflecting mirror added to the PV module system has the aim of determining the optimal angle of mirror in capturing sunlight, and determining the optimal angle of incident sunlight into the PV module system. This condition determines the amount of electrical energy produced by the PV module system.

2.1 The coefficient of solar radiation in Libya

Sun radiation is a magnitude of the coefficient of solar energy that can be received by a unit area of the PV module system in an upright position to the sun with an average distance between the earth and the sun. The amount of radiation in each region has a different value, where this occurs due to differences in the sun's tilt angle and azimuth angle to the earth [16], and the latitude of the region [17]. This study took an experimental area in the Libyan area, where data on Libyan weather conditions came from Belgasim *et al* [18]. Each region of Libya has a different latitude position that makes the reception of radiation beams in each location is different from each other.

Libya is a country located in North Africa which has positions 19°-34° LU and 9°-26° BT [18]. Most of Libya is a desert area with a percentage reaching

88% [19], so the influence of the Sahara Desert weather is clearly visible in this zone and the influence of desert weather is getting stronger in the time of summer. This condition can be used as a place for PV module system application combined with two types of reflecting glass amount, namely two glass and four glass. This is supported by the condition of the Libyan state that is able to receive solar radiation with an average value of 7100 Wh /m²/day in the northern region and 8100 Wh /m²/day in the southern region which occurs for 3500 hours per year [20]. In addition, the country of Libya also has a percentage of Global Horizontal Irradiation (GHI) of 58% with details of the receipt of sunlight radiation of 2000 kWh/m²/year in the north and 2600 kWh/m²/year in the South [21]. Some supporting data in the system of receiving solar radiation in Libya has also been done by researchers, which can be shown in Table 1.

Table 1. Condition of Libya Weather [20,21]

The last time of sunset	19:48
The early of sun rise	6:00
The last time of sun rise	8:07
The early time of sunset	17:14
The average percentage of cloud	41%
The average time of sunlight per days	11:32

The weather conditions data in Libya became the basic data in the process of designing optimal conditions for the application of the PV module system with a combination of reflection mirror. The process of designing a PV module system is done by calculating the characteristics of the system.

2.2 The calculation of photovoltaic characteristic

The competitive utilization of solar energy can be done by combining the combination of the reflecting mirror system with the PV module system in one system. The use of reflective mirror aims to collect more solar radiation that directs directly to the surface area of the PV module system so that it can improve the quality and quantity of electrical energy produced by the system. The process of proving this, then this study uses a method of utilizing the reflection of sunlight from four pieces of reflecting mirror to a PV module and compared with the performance conditions of the two reflecting mirrors in a previous study. The mechanism of the solar radiation reflecting system on the four reflecting mirror along with the PV module system can be shown in Figure 2. In addition, this mechanism is expected to improve the function of the PV module system for the process of converting solar radiation into electrical energy. The direction of the incoming

sunlight after touching the reflecting mirror will move to the part of the PV module system which can make the angles as shown in Figure 3. The condition of the sun's altitude towards the area land and the azimuth angle between the sun and the PV module system is a key parameter in the construction of the combination model of the PV module and the reflector mirror in series or parallel position.

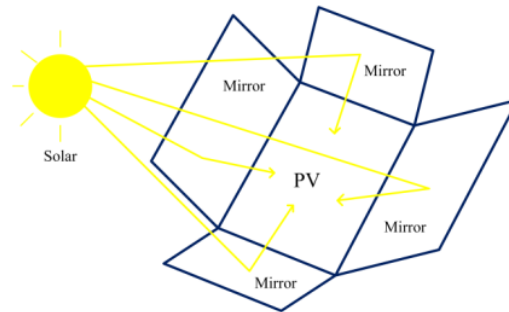


Fig. 2. The combination of PV module-four reflective mirror

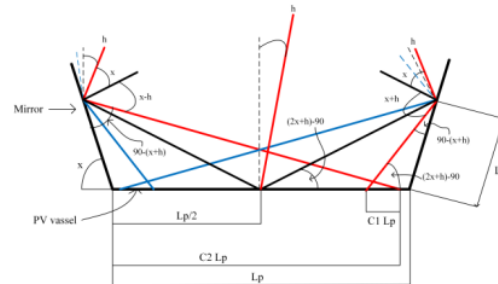


Fig. 3. The direction of irradiation sunlight to the PV module-reflective mirror

The characteristics of solar cells in a PV module system are illustrated by the curve of the relationship between current and voltage of solar cells. The characteristics explain that the relationship between maximum electrical voltage (V_{mp}) and maximum electric current (I_{mp}) in a PV module system. The relationship between the two parameters can produce electrical energy normally so that it can determine the Fill Factor Value (F.F) shown in Equation 1 [13].

$$F.F = \frac{P_m}{I_{sc} \cdot V_{oc}} = \frac{I_m \cdot V_{mp}}{I_{oc} \cdot V_{oc}} \quad (1)$$

The PV module system which consists of solar cell arrays should have a fill factor value (FF) almost close to 80% or 0.8, which with the amount of FF indicates that the PV module system gets the maximum level of efficiency in the process of converting solar radiation energy into electrical energy [13].

2.3 The energy of concentrating solar systems

Concentrating Solar Systems (CPV) construction is a construction that consists of optic¹² reflecting and refracting devices to focus sunlight on the surface of the PV module system. This condition can increase electrical energy as output energy which is indicated by an increase in the output electrical power parameters, in addition to the construction owned by the CPV system can reduce the manufacturing costs of the system [14]. This research deals with the system of low concentration system; which presents geometric modeling and analysis for parameters regarding the amount of solar radiation as input data. The total radiation concentrated in the PV module system can be calculated by Equation 2.

$$R_{Total} = x \cdot \text{direct radiation light} + \text{refraction light} \quad (2)$$

The different magnitude of the solar radiation values can be linked by the Equation 3 [24].

$$I_{th} = I_b \cdot \cos \theta_z + I_{dh} \quad (3)$$

The concentrator consists of a PV module and four mirrors, which are located on the left, right, front and

back sides that are symmetrical with the length of PV module.

2.4 Case study of sun radiation reflection on the PV module surface

Based on the basic model of the CPV system, the⁷ search considers two possible cases, the first when the solar radiation reflected from each mirror sweeps the entire surface of PV-module, and the second when the solar radiation reflected from each mirror only sweeps a portion of the PV-module surface.

2.5 The entire surface of PV module

The reflection of solar radiation (n) from each mirror that sweeps the entire surface of the PV module is expressed based on the extreme position of sunlight, which is shown in Figure 4 - the red line. The reflected condition depends on the maximum angle of incidence and the application of the sinus rule to the ratio between L1 and L3 (calculation ϵ_1) expressed in Equation 4 [24].

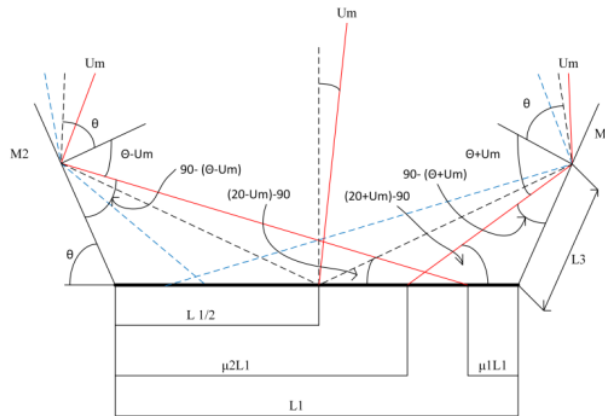


Fig. 4. The geometry model used for CPV systems

$$\epsilon_1 = \frac{L3}{L1} = \frac{-\cos(2\theta + \vartheta_M)}{\cos(\theta + \vartheta_M)} \quad (4)$$

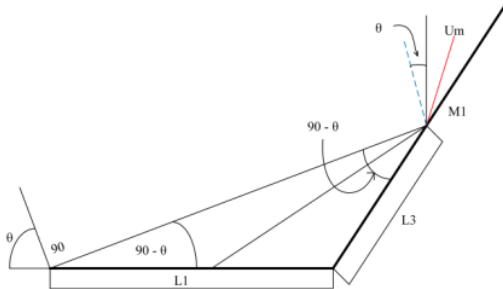


Fig. 5. The triangle geometry of the CPV system

The surface coefficient of the PV module that is affected by the reflection of sunlight can be calculated using Equation 5.

$$\mu_1 = \frac{L3 \cdot \cos(\theta + \vartheta_M)}{-L1 \cdot \cos(2\theta + \vartheta_M)} \quad (5)$$

If N is the number of days in a year, TR is the turbidity factor and alpha is the angle of elevation, then the Bo value can be calculated by Equation 6 [9].

$$B_0 = 1367 \cdot [1 + 0.0334 \cdot \cos(0.9856 \cdot N - 2.27)] \quad (6)$$

The amount of solar radiation absorbed into the surface of the PV module can be calculated by Equation 7 [25].

$$B_s = B_0 \cdot \exp \left[\frac{-T_R}{(0.9 + 9.4 \sin \alpha)} \right] \quad (7)$$

The solar irradiation falling onto the surface of the PV module due to the reflection of sunlight on the mirror glass surface can be calculated by Lambert's Law that shown in Equation 8 [24].

$$B_{p\theta_{M1,2}} = \mu_{1,2} \cdot B_s \cdot \cos(\theta_{M1,2}) \quad (8)$$

2.6 The portion surface of PV module

The reflected sunlight from each mirror is partially exposed to the surface of the PV module shown in Figure 6, as a whole can cover the surface of the PV module area.

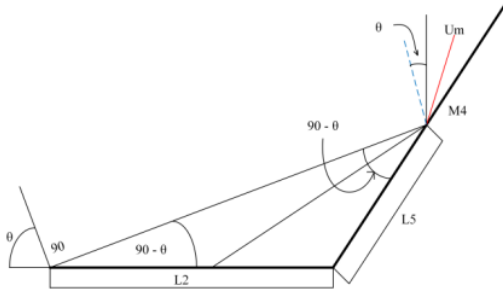


Fig. 6. The triangle geometry of the CPV system

Consideration of sunlight falling on the center of the PV module, shown in Figure 6 with a black line. Based on Figure 6 and the application of sine rules, the ratio between L5 and L2 (calculation $\epsilon 3$) for this case can be explained in equation 9 [25].

$$\epsilon 3 = \frac{L5}{L2} = \frac{-\cos(2\theta + \theta_M)}{\cos(\theta + \theta_M)} \quad (9)$$

The coefficient $\mu 3$ which is reflected sunlight from M4 mirror based on Figure 7 can be calculated by Equation 10 [9].

$$\mu_3 = \frac{L5 \cdot \cos(\theta + \theta_M)}{-L2 \cdot \cos(2\theta + \theta_M)} \quad (10)$$

If N is the number of days in a year, TR is the turbidity factor and α is the angle of elevation, then the B_0 value can be calculated by Equation 11 [25].

$$B_0 = 1367 \cdot [1 + 0.0334 \cdot \cos(0.9856 \cdot N - 2.27)]$$

The amount of solar radiation entering the surface of the PV module can be calculated by Equation 12 [24].

$$B_s = B_0 \exp \left\{ \frac{-T_R}{(0.9 + 9.4 \sin \alpha)} \right\} \left\{ \frac{W}{m^2} \right\} \quad (12)$$

BS is the direct of solar irradiation, TR is the turbidity factor, and α is the angle of elevation and N is the number of days in a year. Sunlight that fall normally into the PV surface can be calculated using Lambert's theorem, in equation 13 [24].

$$B_{p\theta_{M3,4}} = \mu_{3,4} \cdot B_s \cdot \cos(\theta_{M3,4}) \quad (13)$$

The values of θ_M mentioned are adjusted to the maximum incident angle of sunlight divided into some types among others are 0° , 15° , 30° , 45° , 60° , and 75° . While the parameters used as mirror angles (θ) among others are 0° , 5° , 10° , 15° , 20° , 25° , 30° , 35° , 40° , 45° , 50° , 55° , 60° , 65° , 70° , 75° , 80° , 85° , and 90° .

2.7 Efficiency of PV module system

The efficiency of a photovoltaic module system indicates the system's module performance in the process of converting solar radiation energy to be converted into electrical energy. Efficiency calculations can be calculated by Equation 14.

$$\eta = \frac{P_{\max}}{A_{PV} \times \text{Radiation}} \quad (14)$$

3 Result and Discussion

The research results on the design of a PV module system combined with the two reflecting mirrors and four reflecting mirrors are shown in Figure 7. The length of the side of the reflecting mirror has the same dimensions as the length of the PV module system, especially on the front and behind mirror sides. The two performance systems are analyzed using the length parameters of the reflecting mirror, and the angle of the reflecting mirror differ from one another, which is done to obtain the angle of the mirror, the angle of sunlight incidence and the optimal dimension of the length of the reflecting mirror in the absorption of sunlight.

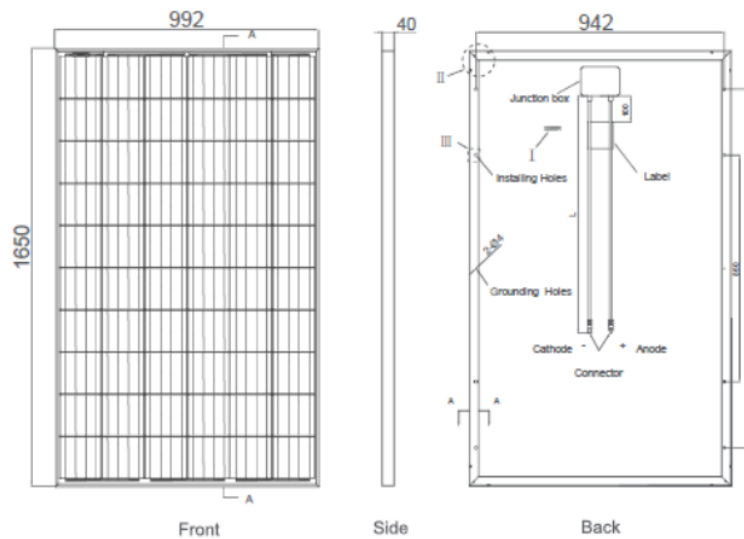


Fig. 7. Dimension of PV module system


The process of receiving solar radiation rays in a PV module system combined with two reflecting mirrors [13] four reflecting mirrors is carried out based on the angle of incidence of solar radiation (\mathcal{G}_M), which is divided into several angles including 0° , 15° , 30° , 45° , 60° , and 75° which can be shown in Figure 8. Based on Figure 8 it can be explained that the increasing the total amount of reflective mirror used in the PV module system, the more the sun's rays are obtained by the PV module system (this condition occurs the amount of solar radiation at four pieces of reflecting mirror are double compared to two reflecting mirrors). The amount of solar radiation increased significantly from 687.59 W/m^2 to 1375.17 W/m^2 with the geometry of the left and right sides of the photovoltaic mirror's surface of 0.4 m ; and the width of the rear and front surface of the photovoltaic surface of 0.25 m , and the angle of the reflector mirror of 45° and the incident angle of sunlight by 0° . The magnitude of solar radiation increased significantly from 712.7 W/m^2 to 1480.72 W/m^2 with the geometry side of the left-side mirror width and right of the photovoltaic surface at 0.22 m ; and the width of the rear and front surface of the photovoltaic mirror of 0.41 m , and the angle of the reflector mirror of 35° and the incident angle of sunlight of 15° .

The amount of solar radiation increased significantly from 595.47 W/m^2 to 1454.95 W/m^2 with the geometry of the left and right sides of the photovoltaic mirror's surface of 0.6 m ; and the width of the rear and front surface of the photovoltaic mirror of 0.57 m , and the angle of the reflector mirror


of 35° and the angle of incident of sunlight of 30° . The magnitude of solar radiation increased significantly from 576.72 W/m^2 to 1667.8 W/m^2 with the geometrical side of the left-side mirror width and right of the photovoltaic surface at 0.34 m ; and the width of the rear and front surface of the photovoltaic mirror of 0.81 m , and the angle of the reflector mirror of 20° and the angle of incident of sunlight by 45° . The magnitude of solar radiation increased significantly from 429.74 W/m^2 to 1724.48 W/m^2 with the geometrical side of the left-side mirror width and right of the photovoltaic surface of 0.83 m ; and the width of the rear and front surface of the photovoltaic mirror of 0.95 m , and the angle of the reflector mirror of 10° and the angle of incident of sunlight of 60° . Consideration of the reception angle of the incident of sunlight and the angle of the reflector mirror results in the amount of solar radiation from the angle of sunlight of 75° unacceptable This is due to the magnitude of the angle of the sun's rays to be captured by the reflecting mirror beyond the receiving limit so that the amount of solar radiation reflected to the PV module system is not optimal. This condition indicates that the PV module system that is used to capture solar radiation in environmental conditions in Libya has a system of receiving solar radiation with four reflective mirror conditions in the incident angle of sunlight from 0° to 60° , with the angle of the reflecting mirror receiver between 10° up to 45° . The small angle of the reflecting mirror receiver causes the area of the reflecting mirror area to receive solar radiation to

increase so that the amount of solar radiation received comes higher. This is also proportional to the increase in the efficiency of the PV module system in


the combination of four reflecting mirrors, for which the efficiency data can be shown in Table 2.

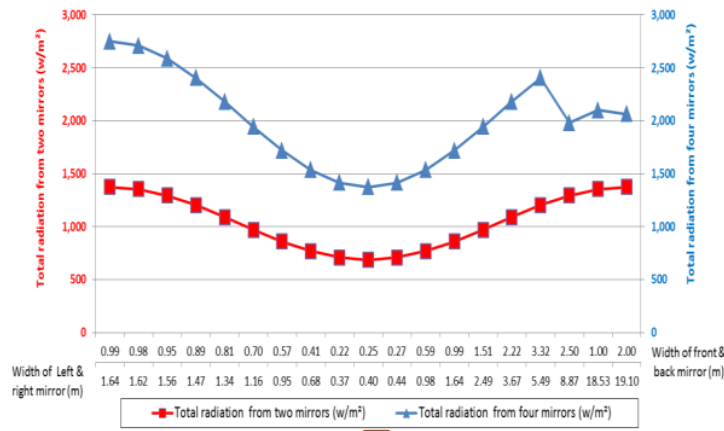


19
(a)

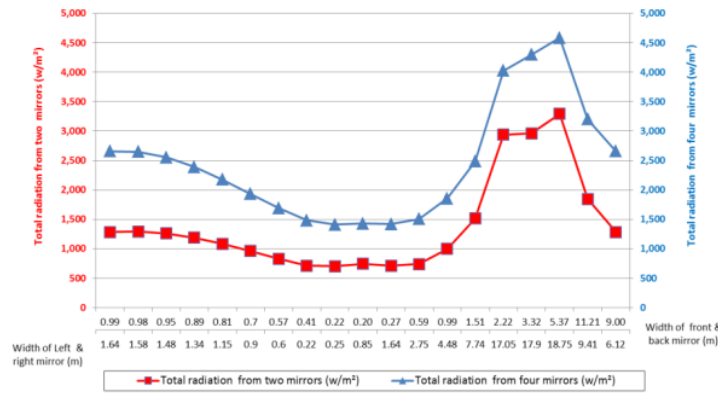


(b)

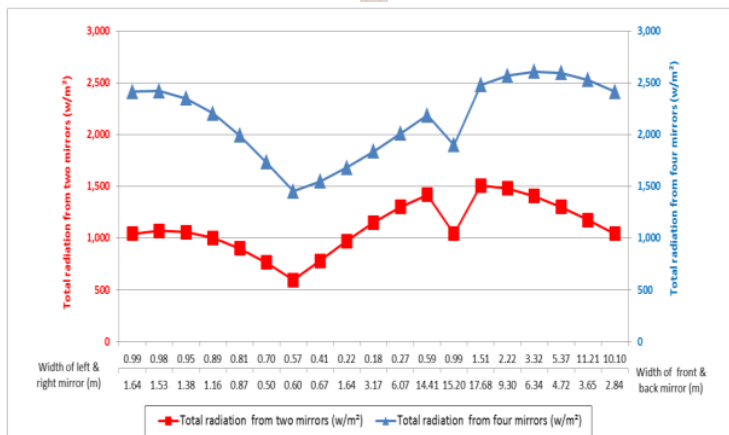

(c)

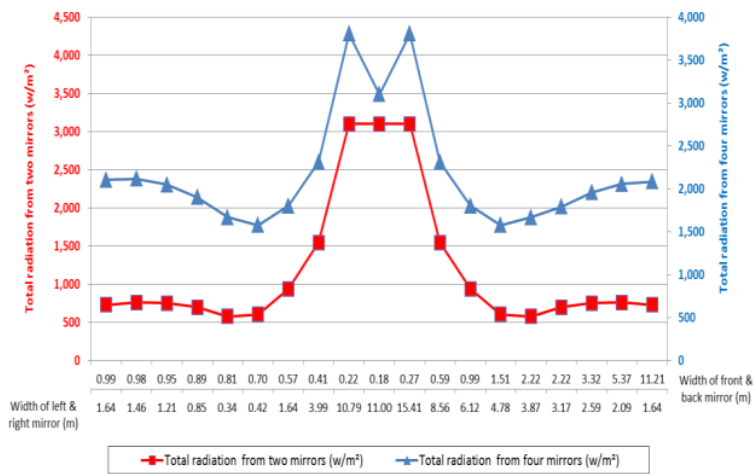

(d)

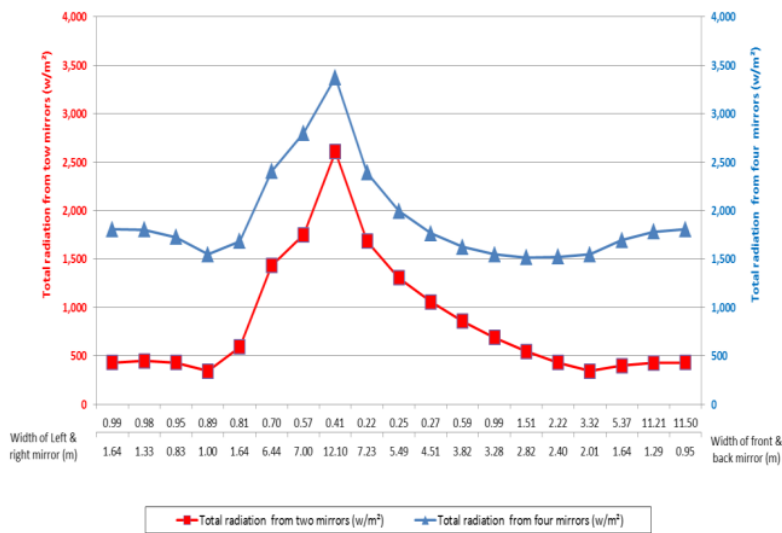

(e)

Fig. 8. The comparison of the magnitude of solar radiation received by two reflecting mirrors (red) and four reflecting mirrors (blue) in the incident angle of solar radiation by (a) 0° (b) 15° (c) 30° (d) 45° and (e) 60°

14

Table 2. The efficiency of the PV module system in the different of the incidence angle of solar radiation

Incidence Angle ($^\circ$)	Area of PV Module (m^2)	Intensity of Solar Radiation (W/m^2)	Maximum Power (W)	Power of open circuit (W)	Efficiency of PV Module (%)
0	1.62	1375.17	270.12	353.28	6.05
15	1.62	1480.72	270.12	353.28	6.26
30	1.62	1454.95	270.12	353.28	6.86
45	1.62	1667.80	270.12	353.28	9.25
60	1.62	1724.48	270.12	353.28	9.22
75	1.62	-	270.12	353.28	-

Based on Table 2 explained that increasing the incidence angle of sunlight can increase the

efficiency of a PV module. This occurs due to the increase in the reception of the solar irradiance along

with the area of the reflecting mirrors that distributes the solar light irradiance to the PV module. The decrease in the efficiency of the PV module occurs at the incidence angle reaching the angle of 60° and the angle of 75°, this is because the fall of solar light irradiance to the surface of the reflecting mirrors becomes refracted and is exposed to other areas.

20 4 Conclusion

The results can be concluded that the utilization of a combination of reflecting mirror in a PV module system is able to increase the magnitude of solar radiation for the electric energy conversion process when compared to traditional systems without using a combination of reflecting mirror technology. The magnitude of solar radiation increases based on parameters of the angle of incidence of sunlight, the angle of the reflecting mirror, and the geometrical dimensions of the reflecting mirror. The increase in the reception of solar radiation occurs along with the decrease in the angle of the reflecting mirror and the increase in the sun's angle of view. This is due to the low angle of the reflecting mirror, thereby increasing the dimensions of the area of the mirror to receive the magnitude of solar radiation to be reflected in the PV module system. The best conditions occur in the PV module system with a combination of four reflecting mirrors with a solar angle of 60° and a reflecting mirror angle of 10°, which is capable of receiving solar radiation of 1724.48 W/m². An increase in the angle of incidence of solar radiation by 75°, is unacceptable because the angle of the reflecting mirror in the reception of sunlight radiation is not able to be suitable with the conditions of the maximum radiation solar reception.

References:

- [1] Ismail I, Pane EA, Haryanto G, Okviyanto T, Rahman RA. A Better Approach for Modified Bach-Type Savonius Turbine Optimization. *Int Rev Aerosp Eng* 2021;14:159. <https://doi.org/10.15866/irease.v14i3.20612>.
- [2] Ismail I, Rahman RA, Haryanto G, Pane EA. The Optimal Pitch Distance for Maximizing the Power Ratio for Savonius Turbine on Inline Configuration. *Int J Renew Energy Res* 2021;11:595–9.
- [3] Rahmalina D, Adhitya DC, Rahman RA, Ismail I. Improvement the Performance of Composite Pcm Paraffin-Based Incorporate With Volcanic Ash As Heat Storage for Low-Temperature. *EUREKA Phys Eng* 2022;3–11. <https://doi.org/10.21303/2461-4262.2022.002055>.
- [4] Pantaleo AM, Camporeale SM, Sorrentino A, Miliozzi A, Shah N, Markides CN. Hybrid solar-biomass combined Brayton/organic Rankine-cycle plants integrated with thermal storage: Techno-economic feasibility in selected Mediterranean areas. *Renew Energy* 2020;147:2913–31. <https://doi.org/10.1016/j.renene.2018.08.022>.
- [5] Rahmalina D, Rahman RA, Ismail. Improving the phase transition characteristic and latent heat storage efficiency by forming polymer-based shape-stabilized PCM for active latent storage system. *Case Stud Therm Eng* 2022;31:101840. <https://doi.org/10.1016/j.csite.2022.101840>.
- [6] Rahmalina D, Rahman RA, Ismail. Increasing the rating performance of paraffin up to 5000 cycles for active latent heat storage by adding high-density polyethylene to form shape-stabilized phase change material. *J Energy Storage* 2022;46:103762. <https://doi.org/10.1016/j.est.2021.103762>.
- [7] Al-addous M, Dalala Z, Alawneh F, Class CB. Modeling and quantifying dust accumulation impact on PV module performance. *Sol Energy* 2019;194:86–102. <https://doi.org/10.1016/j.solener.2019.09.086>.
- [8] Alexandru C. The Mechatronic Model of a Photovoltaic Tracking System. *Int J Eng Appl* 2014;2:195–204.
- [9] Mansoor O M, Simon SP, Kumar KA, Sundareswaran K, Nayak PSR, Padhy NP. Impact and economic assessment on solar PV mirroring system – A feasibility report. *Energy Convers Manag* 2020;203:112222. <https://doi.org/10.1016/j.enconman.2019.112222>.
- [10] Blorfan A, Wira P, Flieller D, Sturtzer G, Merckle J. Performance Optimization of a Photovoltaic Generator with an Active Power Filter Application. *Int J Eng Appl* 2013;1:106–12.
- [11] Rahman RA, Suwandi A, Nurtanto M. Experimental investigation on the effect of thermophysical properties of a heat transfer fluid on pumping performance for a convective heat transfer system. *J Therm Eng* 2021;7:1628–39. <https://doi.org/10.14744/jten.2021.0006>.
- [12] Ismail, John J, Pane EA, Maulana R, Rahman RA, Suwandi A. Experimental evaluation for the feasibility of test chamber in the open-loop wind tunnel. *WSEAS Trans Fluid Mech* 2021;16:120–6. <https://doi.org/10.37394/232013.2021.16.12>.
- [13] Julajaturasarath S, Jonburom W, Pornsuwancharoen N. The experiment of double solar energy by reflection light method. *Procedia Eng* 2012;32:522–30. <https://doi.org/10.1016/j.proeng.2012.01.1303>.
- [14] Kabeel AE, Abdelgaied M, Sathyamurthy R. A comprehensive investigation of the optimization cooling technique for improving the performance of PV module with reflectors under Egyptian conditions. *Sol Energy* 2019;186:257–63. <https://doi.org/10.1016/j.solener.2019.05.019>.
- [15] Sutter F, Montecchi M, von Dahlen H, Fernández-García A, Röger M. The effect of incidence angle

- on the reflectance of solar mirrors. *Sol Energy Mater Sol Cells* 2018;176:119–33. <https://doi.org/10.1016/j.solmat.2017.11.029>.
- [16] Danandeh MA, Mousavi SMG. Solar irradiance estimation models and optimum tilt angle approaches : A comparative study. *Renew Sustain Energy Rev* 2018;92:319–30. <https://doi.org/10.1016/j.rser.2018.05.004>.
- [17] Bertrand C, Housmans C, Leloux J, Journée M. Solar irradiation from the energy production of residential PV systems. *Renew Energy* 2018;125:306–18. <https://doi.org/10.1016/j.renene.2018.02.036>.
- [18] Belgasim B, Aldali Y, Abdunnabi MJR, Hashem G, Hossin K. The potential of concentrating solar power (CSP) for electricity generation in Libya. *Renew Sustain Energy Rev* 2018;90:1–15. <https://doi.org/10.1016/j.rser.2018.03.045>.
- [19] Knight J, Zerboni A. Formation of desert pavements and the interpretation of lithic-strewn landscapes of the central Sahara. *J Arid Environ* 2018;153:39–51. <https://doi.org/10.1016/j.jaridenv.2018.01.007>.
- [20] Kutucu H, Almryad A. Modeling of Solar Energy Potential in Libya using an Artificial Neural Network Model. *IEEE First Int. Conf. Data Stream Min. Process., Lviv: 2016*, p. 356–9.
- [21] Pravalie R, Patriche C, Bandoc G. Spatial assessment of solar energy potential at global scale. A geographical approach. *J Clean Prod* 2019;209:692–721. <https://doi.org/10.1016/j.jclepro.2018.10.239>.
- [22] Xie Q, Liao X, Chen L, Zhang M, Gao K, Huang B, et al. Random copolymerization realized high efficient polymer solar cells with a record fill factor near 80 %. *Nano Energy* 2019;61:228–35. <https://doi.org/10.1016/j.nanoen.2019.04.048>.
- [23] Lamnatou C, Chemisana D. Concentrating solar systems : Life Cycle Assessment (LCA) and environmental issues. *Renew Sustain Energy Rev* 2017;78:916–32. <https://doi.org/10.1016/j.rser.2017.04.065>.
- [24] Baccoli R, Kumar A, Frattolillo A, Mastino C, Ghiani E, Gatto G. Enhancing energy production in a PV collector – Reflector system supervised by an optimization model: Experimental analysis and validation. *Energy Convers Manag* 2021;229:113774. <https://doi.org/10.1016/j.enconman.2020.113774>.
- [25] Boito P, Grena R. Application of a fixed-receiver Linear Fresnel Reflector in concentrating photovoltaics. *Sol Energy* 2021;215:198–205. <https://doi.org/10.1016/j.solener.2020.12.024>.

Contribution of individual authors to the creation of a scientific article (ghostwriting policy)

Budhi M Suyitno: Conceptualization and Supervision

La Ode Mohammad Firman: Supervision and Validation

Erlanda Augupta Pane: Writing – original draft and Formal Analysis

Mohamed Ibrahim Kriba: Investigation, Methodology, and Formal Analysis

Ismail: Supervision, Validation and Writing – review & editing

Sources of funding for research presented in a scientific article or scientific article itself

Not Available

Creative Commons Attribution License 4.0 (Attribution 4.0 International, CC BY 4.0)

This article is published under the terms of the Creative Commons Attribution License 4.0

https://creativecommons.org/licenses/by/4.0/deed.en_US

Analysis of Solar Power Plants with The Combination Systems of PV Module-Reflective Mirror

ORIGINALITY REPORT

13%

SIMILARITY INDEX

9%

INTERNET SOURCES

10%

PUBLICATIONS

3%

STUDENT PAPERS

PRIMARY SOURCES

1	wseas.com Internet Source	2%
2	Submitted to National University of Public Service - Institute for Research and Development on State and Governance Student Paper	1%
3	www.mdpi.com Internet Source	1%
4	hdl.handle.net Internet Source	1%
5	Guangli Fan, Yingjie Gao, Hamdi Ayed, Riadh Marzouki, Yashar Aryanfar, Fahd Jarad, Peixi Guo. "Energy and exergy and economic (3E) analysis of a two-stage organic Rankine cycle for single flash geothermal power plant exhaust exergy recovery", Case Studies in Thermal Engineering, 2021 Publication	1%
6	epdf.pub Internet Source	1%

7	<p>Kalaiselvan Narasimman, Selvarasan Iniyar, Ranko Goic. "Experimental investigation of ridge concentrator PV-based solar water pumping system for small-scale applications", Energy Sources, Part A: Recovery, Utilization, and Environmental Effects, 2019</p> <p>Publication</p>	1 %
8	<p>S. Julajaturasirath, W. Jonburom, N. Pornsuwancharoen. "The experiment of double solar energy by reflection light method", Procedia Engineering, 2012</p> <p>Publication</p>	1 %
9	<p>www.researchgate.net</p> <p>Internet Source</p>	1 %
10	<p>Mohammad Karimzadeh Kolamroudi, Mustafa Ilkan, Fuat Egelioglu, Babak Safaei. "Maximization of the output power of low concentrating photovoltaic systems by the application of reflecting mirrors", Renewable Energy, 2022</p> <p>Publication</p>	<1 %
11	<p>mafiadoc.com</p> <p>Internet Source</p>	<1 %
12	<p>ebin.pub</p> <p>Internet Source</p>	<1 %
13	<p>www.psa.es</p> <p>Internet Source</p>	<1 %

14

Sudhir Kumar Pathak, Pravin Omprakash Sharma, Varun Goel, Suvanjan Bhattacharyya, Hikmet Ş. Aybar, Josua P. Meyer. "A detailed review on the performance of photovoltaic/thermal system using various cooling methods", Sustainable Energy Technologies and Assessments, 2022

Publication

<1 %

15

Submitted to Coventry University

Student Paper

<1 %

16

Hakan Kutucu, Ayad Almryad. "Modeling of solar energy potential in Libya using an artificial neural network model", 2016 IEEE First International Conference on Data Stream Mining & Processing (DSMP), 2016

Publication

<1 %

17

Mohamed Gomaa, Ramadan Mustafa, Hegazy Rezk, Mujahed Al-Dhaifallah, A. Al-Salaymeh. "Sizing Methodology of a Multi-Mirror Solar Concentrated Hybrid PV/Thermal System", Energies, 2018

Publication

<1 %

18

Pough, Harvey, Bemis, William E., McGuire, Betty Anne. "Vertebrate Life", Vertebrate Life, 2022

Publication

<1 %

19

ena.lp.edu.ua:8080

Internet Source

<1 %

20

Erlanda Augupta Pane, Hendri Sukma, Arif Riyadi Tatak, Ismail. "The utilization of solid waste treatment for charcoal making and water heating by continuous incineration", E3S Web of Conferences, 2018

Publication

<1 %

21

Mohamed Almaktar, A.M. Elbreki, Mohamed Shaaban. "Revitalizing operational reliability of the electrical energy system in Libya: Feasibility analysis of solar generation in local communities", Journal of Cleaner Production, 2021

Publication

<1 %

22

Tareq Salamah, Ahmad Ramahi, Kadhim Alamara, Adel Juaidi et al. "Effect of dust and methods of cleaning on the performance of solar PV module for different climate regions: Comprehensive review", Science of The Total Environment, 2022

Publication

<1 %

23

eprints.undip.ac.id
Internet Source

<1 %

24

oa.upm.es
Internet Source

<1 %

ore.exeter.ac.uk

25

Internet Source

<1 %

26

Monika Agrawal, Priyank Chhajed, Amartya Chowdhury. "Performance analysis of photovoltaic module with reflector: Optimizing orientation with different tilt scenarios", Renewable Energy, 2022

Publication

<1 %

27

Muhammad Umar Khan, Muhammad Abbas, Muhammad Mubeen Khan, Anila Kousar, Mehboob Alam, Yehia Massoud, Syed Hassan Mujtaba Jafri. "Modeling and design of low-cost automatic self cleaning mechanism for standalone micro PV systems", Sustainable Energy Technologies and Assessments, 2021

Publication

<1 %

Exclude quotes Off

Exclude matches Off

Exclude bibliography On